



## LINARIX Linear Sensor

LU0-AV002-0413-2P00-PAM



### General Data

#### General Data

Supply Voltage	8 - 32 VDC
Turn On Time	<500 ms
Operating Temperature	-30 °C (-22 °F) - +80 °C (+176 °F)
Weight	420 g (0.93 lb)
Protection Class (Encoder)	IP64 / IP65
EMC: Emitted Interference	DIN EN 61000-6-4
EMC: Noise Immunity	DIN EN 61000-6-2

#### Mechanical Data

Max. Measurement Length	1.90 m (6.23')
Length per Revolution	150 mm
Wire Material	Coated Polyamide Stainless Steel
Wire Diameter	0.45 mm
Encoder Housing Material	Steel
Draw Wire Housing Material	Aluminum
Max. Speed of Wire Displacement	2.0 m / s
Max. Wire Acceleration	12.0 g
Max. Extension Force	5.0 N
Min. Retraction Force	3.5 N

Data Sheet

Printed at 4-06-2019 10:06

# POSITAL

## FRABA



Actuation Lifetime	1.0 mio Cycles
Wire Mounting	Eyelet

### Sensor Data

Technology	Magnetic ( $\leq 0.09^\circ$ )
Accuracy	$\pm 0.02$ % FSO
Repeatability	$\pm 0.006$ % FSO
Resolution [Encoder - Singleturn]	13 bit
Resolution [Encoder - Multiturn]	4 bit
Approx. Linear Resolution	18.3 $\mu\text{m}$
Output Code	Analog Voltage 0 - 10 V

### Interface

Communication Interface	Analog Voltage
Manual Functions	Start and End point via Cable or Connector

### Outputs

### Outputs

### Electrical Data


Current Consumption	Typical 15 mA @24V (no load)
Min. Load Resistance	5 k $\Omega$
Analog Accuracy	@ 10 V = $\pm 10$ mV (with an ideal power supply)
Settling Time	32 ms (from min value to max value jump)
Reverse Polarity Protection	Yes
Short Circuit Protection	Yes
MTTF	257.6 years @ 40 °C

### Electrical Connection

Connection Orientation	Axial
Connection Orientation (w.r.t Draw Wire)	Radial 0 / Axial
Connector	M12, Male, 5 pin, a coded

### Product Life Cycle

Product Life Cycle	Established
--------------------	-------------

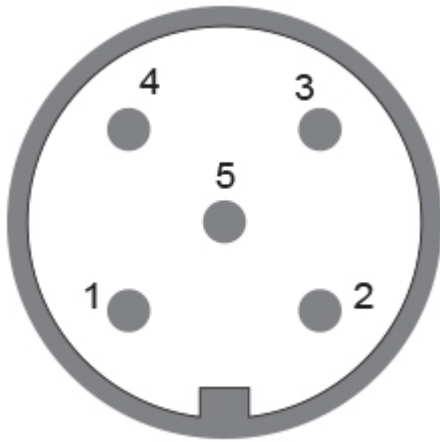

### Connection Plan

SIGNAL	CONNECTOR	PIN NUMBER
Power Supply	Connector 1	2
GND	Connector 1	3
Analog Output	Connector 1	1
Set1/Direction	Connector 1	5
Set2/Zero Set	Connector 1	4

### Connector-View on Encoder Dimensional Drawing

#### [2D Drawing](#)

### Accessories

#### Connectors & Cables

10m PUR Cable, 5pin, A-Coded, f

2m PUR Cable, 5pin, A-Coded, f

5m PUR Cable, 5pin, A-Coded, f

10m PUR Cable, 5pin, A-Coded, f

M12, 5pin A-Coded, Female

More

#### Displays

AP22-D0 Analog Display (4 dig. o/p)

DiMod-A Analog Display

### Contact



Contact Us

All dimension in [inch] mm. Encoder dimensions may vary depending on electrical interface and connector. This drawing and the information contained is for general presentation purposes only. Please refer to the "Download" section for detailed technical drawings. © FRABA B.V., All rights reserved. We do not assume responsibility for technical inaccuracies or omissions. Specifications are subject to change without notice.